


D

C

B

A

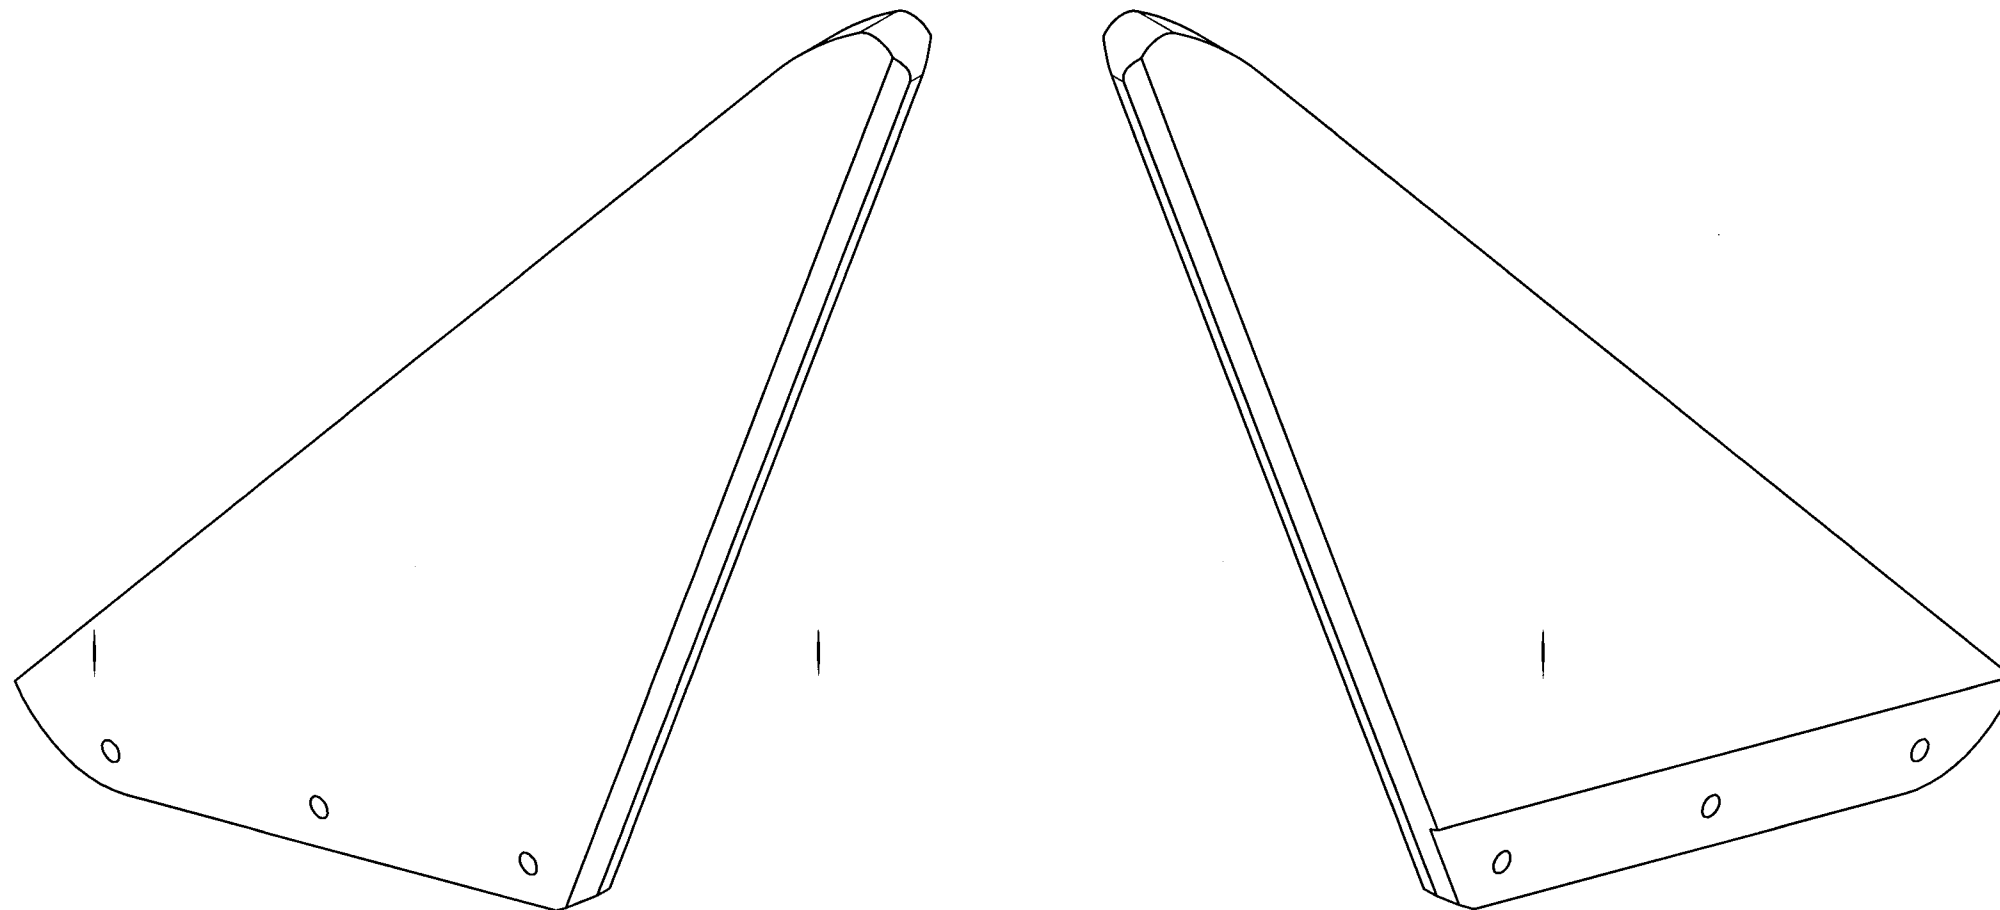

D5576-1 DEFLECTOR, UPPER, CABLE CUTTER

- NOTES:**
1) MATERIAL: 7075-T6 (OR T651/T6510/T6511/T62) ALUMINUM BAR
PER AMS-QQ-A-225/9 (OR AMS 4122/4123/4186/4187) OR
PER AMS-QQ-A-200/11
REF DART SPEC M7075T6B
OR: 7075-T6/T62/T651 ALUMINUM SHEET OR PLATE
PER QQ-A-250/12 OR AMS-QQ-A-250/12 OR
AMS 4045 OR ASTM B209
REF DART SPEC M7075T6S
2) FINISH: ANODIZE PER MIL-A-8625, TYPE II, CLASS 2, COLOR = BLACK
PRIME USING MIL-PRF-23377, 1-2 MIL MAX, PER DART QSI 005 4.2.1.3.2
3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
4) UNITS: INCHES UNLESS OTHERWISE NOTED
5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
6) IDENTIFICATION: IDENTIFY PER QSI 044 6.7
7) WEIGHT: 1.01 lbs

RELEASED

2018 FEB 28
ECW 18-581

APPROVED

A	NEW ISSUE	CP	17.11.21
REV.	DESCRIPTION	BY	DATE
DESIGN	AJS	DART AEROSPACE USA, INC.	
DRAWN	CP	EUGENE, OR	
CHECKED	RF	DRAWING NO.	REV. A
MFG. APPR.	JFS	D5576	SHEET 1 OF 2
APPROVED	HS	TITLE	DEFLECTOR, UPPER, CABLE CUTTER
DE APPR.	CP	SCALE	NTS
DATE	17.11.21	COPYRIGHT © 2017 BY DART AEROSPACE USA, INC. THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE USA, INC.	

D

C

B

A

8

7

6

5

4

3

2

1

